





PRODUCT FEATURES

- High power 550 Lumen 5.7w white 6500K COB LED
- Press & Hold Turbo mode with additional Red modes
- Ultra tough nylon & polycarbonate construction
- Super compact and lightweight size
- 160° Rotating stand with strong magnet
- Smart Memory remembers last mode used
- Glow-in-the-Dark strip around led
- Comes with a carabiner and handy storage bag
- IPX6 water proof
- Powerful 3.7v 1200mah li-polymer battery
- Useful battery level & charging indicators
- 1A USB-C charging fast 1.5 hour charge time
- 30cm USB-C charging cable included

BATTERY - 3.7v 1200mAh Li-polymer Rechargeable Battery WEIGHT - 74a

DIMENSIONS - 54 x 28 x 60mm

OPERATING INTRUCTIONS

LEFT BUTTON

WHITE MODES: High > Medium > Low > Off

Press & hold for Turbo mode, battery lasts a total of 1 hour runtime whilst pressing & holding.

RIGHT BUTTON

RED MODES: High > Flash > Off

SMART MEMORY:- If left ON in any mode for 5+ seconds, the next press will turn OFF. Next press ON will return to the last mode used.

- ADVICE & IMPORTANT INFORMATION!

 Do not look directly at LEDs.

 Do not operate in direct sunlight or extreme temperature conditions (below -20°C or above 60°C).
- LEDs can become warm/hot when switched on; DO NOT touch and NEVER place face down on any surface risk of fire! Even once the device has been switched off, DO NOT place face down as the LED/Lens will stay hot/warm
- Do not use the device in the immediate vicinity of flammable materials or
- gases.

 Take care when charging, check the charging output on the charging source you are using and DO NOT exceed the stated Max charging input or damage may occur to the battery and may void the warranty.


 The rechargeable battery will reach full performance after a few complete charging and discharging cycles.

 To keep the rechargeable battery in optimum condition, it should be recharged every 3-6 months, especially if it is not being used for a long period of time. Always fully charge rechargeable batteries before storage and if the rechargeable battery can be removed, this is advised to avoid battery depletion and avoids the risk of a battery leaking.

 Always protect lithium batteries from heat, intense sunlight, fire, water and moisture danger of explosion!

- moisture danger of explosion! If a battery is damaged, fluids can leak out. AVOID contact as this can lead to skin irritation and/or burns. If skin contact occurs, rinse thoroughly with water. If irritation persists, seek medical advice. Seek immediate medical assistance if

ANSI FL1 Standard

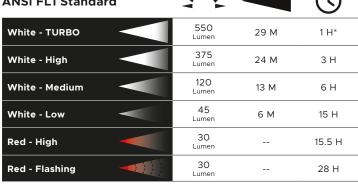

RECHARGING

- 1. Only use a 5V USB-C charging cable (max 1A)
- 2. Lift the charging port cover on the top of the device.
- 3. Plug the USB-C end of the cable into the charge port.
- 4. Plug the USB-A end of the cable into a USB charging source (do not exceed 5V-1A charging input or damage may occur. Please do not use "Fast Chargers" as this can over-load the battery).
- 5. 4 x Blue LEDs on the back of the device will flash to indicate charging. Once fully charged all LEDs will light up constantly.
- 6. Charge Time: 1.5 hours
- 7. Make sure the charge port cover is secured back in place.

Warranty void if not used with the specified cable & max charge input



lithium battery fluid comes into contact with the eyes

lithium battery fluid comes into contact with the eyes. Children under 12 years of age should only use the product under adult supervision. Do not disassemble or attempt to modify the product; this will void the warranty and can be dangerous. Improper use or modification is not covered under the warranty. Take care not to let lenses come into contact with hard/sharp objects, damage/scratches to lenses will affect light output. Do not use the product in the immediate vicinity of flammable materials or gases.

- Do not use the product in the immediate vicinity of flammable materials or gases. Before cleaning the product, disconnect the charge cable. Clean with a dry or slightly moist, clean, lint-free cloth and a mild detergent if required. Do not use cleaners that contain abrasives or solvents. This product is water resistant to IPX6 DO NOT SUBMERGE. If the product has been subjected to excessive moisture/water the warranty may be void. This product has a 1 year standard warranty (or extended to 2 years once registered online at WWW.UNILITE.CO.UK/WARRANTY) against manufacturing faults and defects. It does not cover normal wear and tear, modifications, accidental damage or poor maintenance. Unilite warranties do not cover disposable battery leaks or the use of incorrect chargers and cables that can damage rechargeable batteries.

 Do not dispose of this device in normal household waste. It must be disposed of via an authorised electrical appliance disposal centre or at your local waste
- of via an authorised electrical appliance disposal centre or at your local waste disposal unit.
- Please re-use or recycle packaging responsibly. Keep these instructions for future reference or for subsequent possessors.